

Installation Instructions





BAND-IT Ties

Maximum Operating Temperature: Coating = 300°F (149°C)

Rated Load (Loop Tensile Strength, single wrap) :
1/4" Tie = 75 LBS
3/8" Tie = 100 LBS
5/8" Tie = 200 LBS

Rated Load (Loop Tensile Strength, double wrap) :
1/4" Tie = 300 LBS
3/8" Tie = 500 LBS
5/8" Tie = 800 LBS

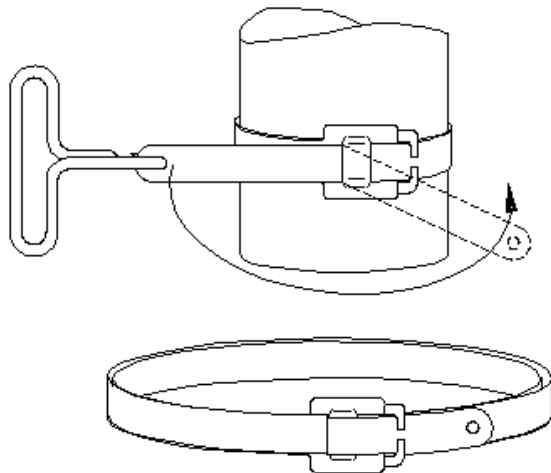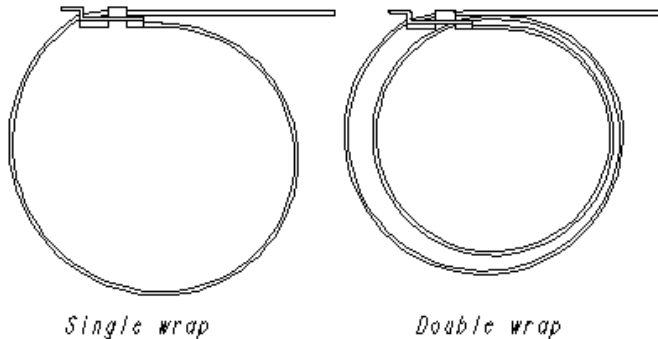

1. Wrap BAND-IT tie around object with the locking ears up. Wrap per diagram at left.

2. Tighten BAND-IT ties with one of these (listed in order of increasing tension):

- By hand,
- BAND-IT AE201 Tensioning Hook,
- BAND-IT AE200 Tensioning Tool,
- BAND-IT C075 Bantam Tool.

3. Bend tail back over raised bridge.

4. Secure tail under ears by slightly pushing the tail sideways and down, first one way then the other.

5. Tail may be left on for re-use.

6. Optional: Hammering down the bridge may increase the strength of the lock, but will not allow the clamp to be re-used.

Refer to website for warranty information: <http://www.band-it-idex.com/warranty.html>

BAND-IT-IDEX, Inc.
A Unit of IDEX Corporation
4799 Dahlia Street
Denver, CO 80216-3070 USA
P: 1-800-525-0758
F: 1-800-624-3925

BAND-IT Company Limited
A Unit of IDEX Corporation
Speedwell Industrial Estate
Staveley, Nr. Chesterfield
Derbyshire, S43 3PF England
P: (44) 1246-479479
F: (44) 1246-479480

BAND-IT Clamps (Asia) Pte. Ltd.
11 Second Chin Bee Road
Singapore 618777
P: 65-6265-8853
65-6265-8783
F: 65-6265-8902

www.BAND-IT-IDEX.com

www.BAND-IT.co.uk

www.BAND-IT-clamps.com