
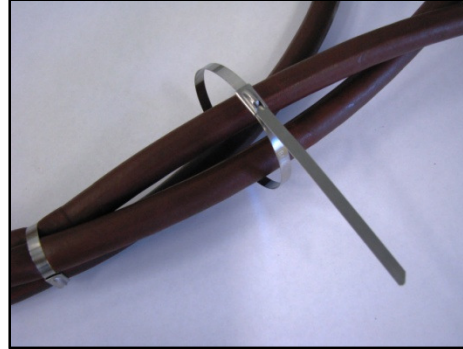


Operating Instructions

A) Use only
BAND-IT brand
name ties.

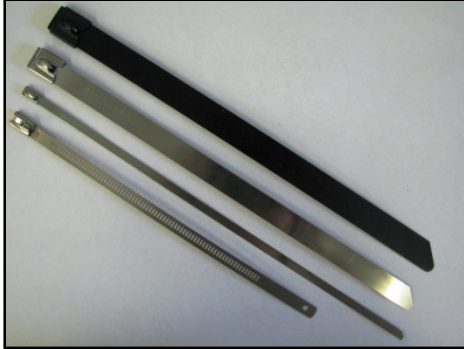

B) Form a tie
by threading
the tail end
through the
buckle.

C) Tighten the tie
snug by hand,
leaving at least a
3" tail.




D) Insert the tail of
the tie into the
head of tool and
the slot of the
winding mandrel.

E) Tension the tie
by repeatedly
squeezing the
handles. When the
desired tension is
reached, release
the handles. Do
not over tension the
tie.



F) Cut off the
excess tail by
firmly pushing the
cut-off handle
downward.



G) Carefully
remove the
excess tail from
the winding
mandrel.

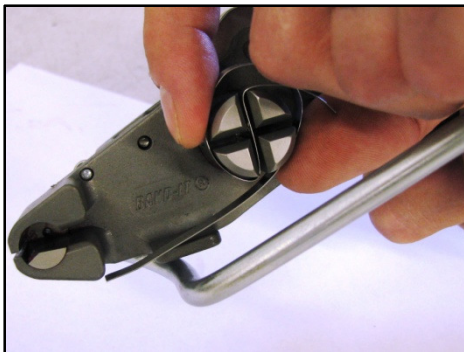

H) Example of
clamped tie.

Adjusting Tool Handle Positions

The handles of this tool are adjustable to three pre-set locations to allow for different orientations of the tool head to the handles. This is for better ergonomics and easier fit in tight spaces, overhead use, etc. Remove quick release pin from the tool, and insert it in the desired location.

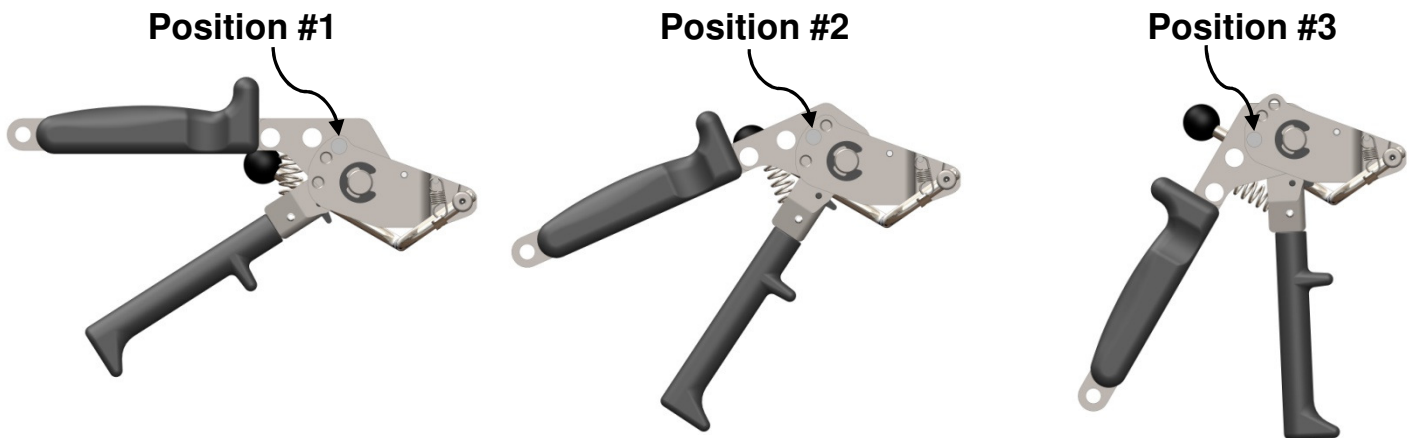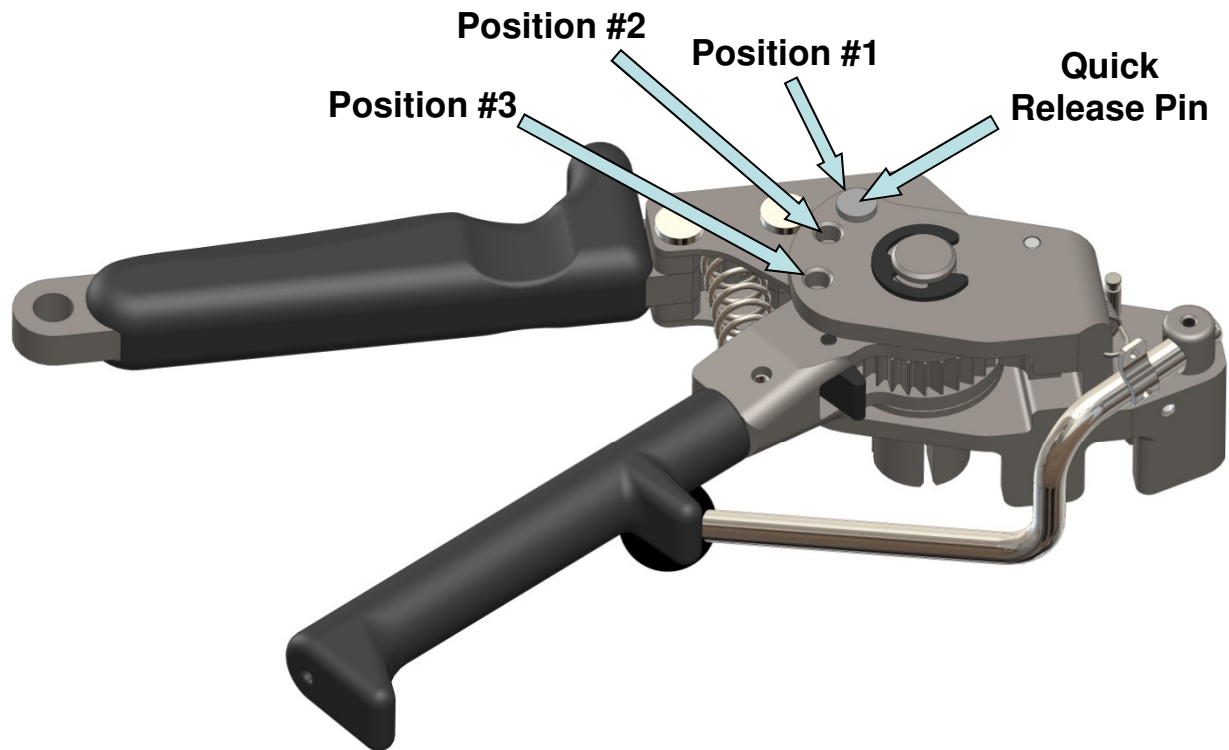

Tool Specifications

Tie Types	This tool is designed for use with all BAND-IT Ball-Lok , Multi-Lok, and Self-Lok® ties.
Tool Weight	1.6 lbs
Min. Required Tie Tail Length	3.0 in

Clean and lubricate all moving parts as necessary.

Refer to website for warranty information: <http://www.band-it-idex.com>

CB1000 Tool Manual

