

Operating Instructions


LOKMATE™ CLIP FASTENING TOOL

PATENT PENDING



Table of Contents

Warranty.....3
Safety Guidelines.....3
Setup Instructions.....4
Tool Operation.....5

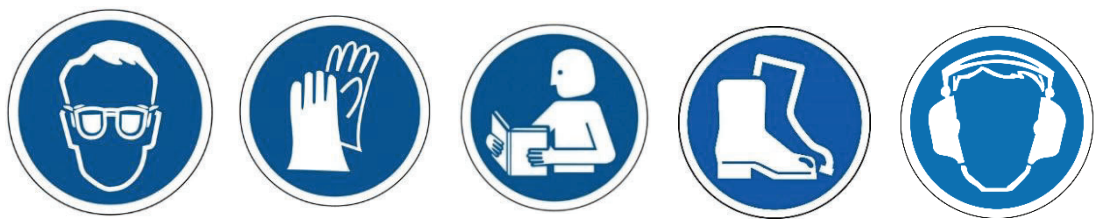

Warranty and Safety Guidelines

WARRANTY

Refer to website for warranty information: <http://www.band-it-idex.com/terms-conditions>

NOTE: Any performance data published herein is based on laboratory tests, which cannot duplicate conditions that may be encountered in field installations. Such conditions may vary results substantially from those shown (such as abuse in handling and installation. Failure to follow recommended handling and installation practices, abnormal environmental conditions, disregard of operating instructions for BAND-IT tools or non-recommended combinations of BAND-IT products). BAND-IT cannot be responsible for performance characteristics from such variables.

Safety Guidelines

WARNING:

Always wear safety equipment when operating this tool and keep both hands and clothing away from clamp being tensioned. Detailed instructions are in this manual and the operator is advised to read it and become familiar with operating the tool.

Only compatible with BAND-IT LFFC BAND-FAST® assemblies or with LE155-316UK buckles.

Current models:

- ***LT625D – 5/8" Double Clip***

SAFETY SIGNS




It is recommended to utilize the tether attachment when operating at elevated heights.


Keep hands clear of mouth while operating to avoid potential pinch point.

Setup Instructions

1. Read safety instructions and operator's manual for the chosen drill this tool is attached too
 1. Remove tool from packaging
 2. **Attach tether if working at heights.**
2. This tool was designed for use with BAND-IT coated BAND-FAST band assemblies with LE155-316UK buckles. Do not attempt to use any other type or size of buckle.

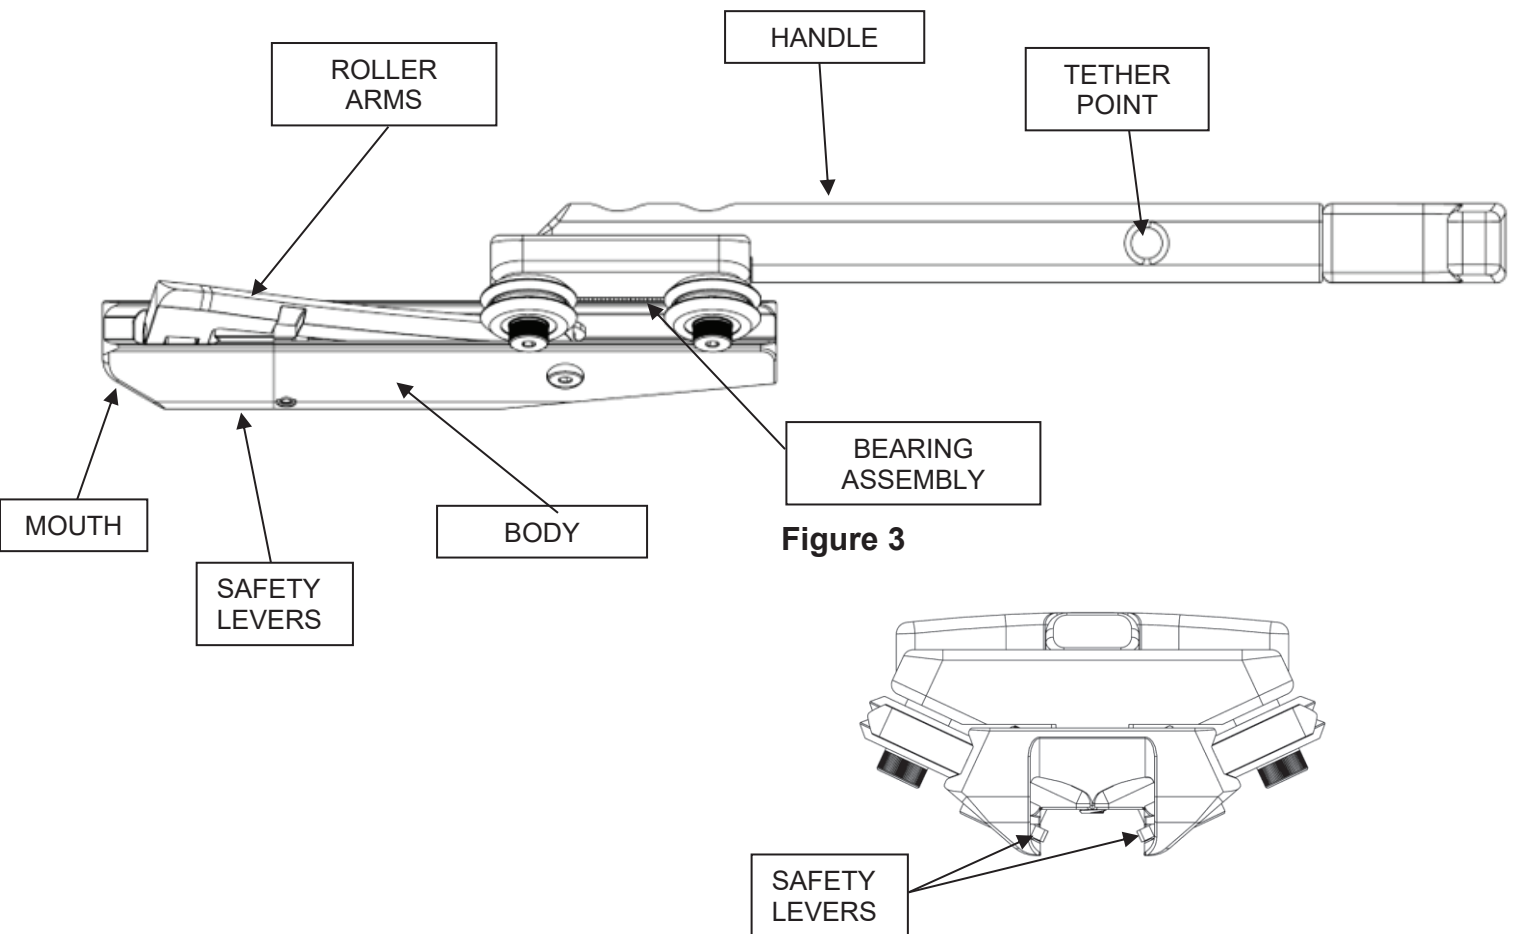


Tool Operation




1. Wrap band around object to be clamped. Insert band through buckle once for single-wrap or twice for double-wrap.




2. If desired, you may pre-form a clamp in the same fashion as step 2.




3. Position the tie on the object you are clamping. Pull the wrapped tie hand tight. Slightly bend the tail up to keep the clamp in place.




4. Insert buckle and folded tail into mouth of LokMate Clip Fastening Tool.




5. Ensure LokMate is fully forward on the buckle.

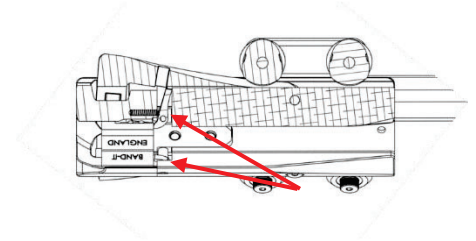


6. Safety levers will activate only when buckle is pressing against them – tool will not press forward without proper engagement.



6. Push tool forward to fold buckle ears.



8. Ensure tool is fully forward, should feel slight tactile 'click' when complete.



9. Release handle and pull backward from buckle.